

Vanmark Corporation Vertical Hydrolift Destoner/Screw Auger Conveyor

Mfg: Vanmark

Model:

Stock No.: DWKN03


Serial No.: M22-042685

Vanmark Corporation Vertical Hydrolift Destoner/Screw Auger Conveyor. S/N: M22-042685. Infeed hopper dimensions: 4 ft. L x 1 ft. 7 in. W. Screw auger dimensions: 1 ft. 3 in. dia. x 10 ft. 5 in. H. Reliance Electric Motor, 5 hp, 1750 rpm, 460 V, 6.6 amps, 60 Hz, 3 phase. Driver pulley diameter: 3 in. Driven pulley diameter: 1 ft. 7 in. Pulley ratio: 0.15. Final speed: 276 rpm. Automatic rock remover paddle dimensions: 3 ft. 9 in. dia. x 6 in. W. Reliance Electric Motor with Speed Reducer, 1/2 hp, 1725 rpm, 208-230/460 V, 1.7/.85 amps, 60 Hz, 3 phase. Inlets: (1) 1 ft. 4 in. W x 1 ft. 2 in. H. product infeed. Outlets: (1) 2 in. dia. FNPT rock remover port, (2) 2-1/2 in. dia. NPT overflow ports, (1) 4 in. dia. drain port, (1) 1 ft. 3 in. L x 1 ft. 2 in. W product discharge. Overall dimensions: 5 ft. L x 5 ft. W x 10 ft. 9 in. H.







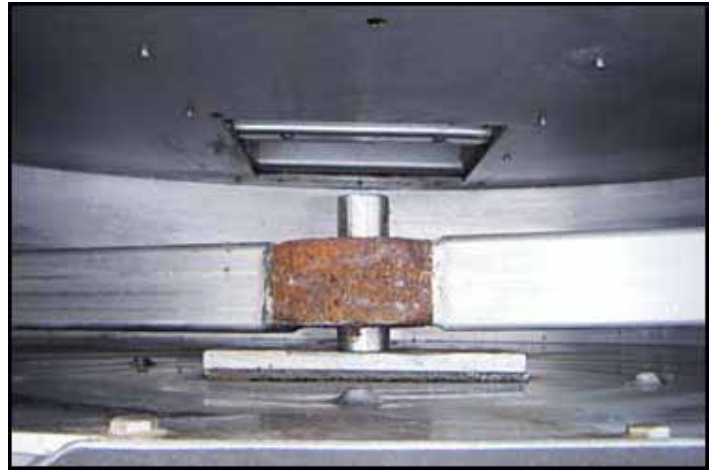



RELIANCE ELECTRIC E-Z KLEEN PLUS TE IP56

| ID# | P56X4706M | AM | FR | FB56C | TYPE P | PH. 3 |
|-----|-----------|---------|---------|-------|--------|-------|
| HP | RPM | VOLTS | AMPS | HZ | SF | CODE |
| .50 | 1725 | 208-230 | 1.7-1.7 | 60 | 1.15 | J |
| | | 460 | .85 | | | |

TIME RATING CONT INS. CL. F INS. TYPE F+ AMB. 40 NEMA DESIGN 60 HZ NOM EFF 80 QUAR. EFF. POWER FACTOR

200V MIN P56X4706-10SIF

WARNING
 THIS EQUIPMENT MAY BE EXPOSED TO A TEMPERATURE OF 40°C (104°F) DURING NORMAL OPERATION. TO PREVENT BURNING, DO NOT TOUCH THE MOTOR HOUSING OR THE MOTOR TERMINALS. ALWAYS USE PROPER LOCKING AND TAGGING PROCEDURES TO PREVENT THE MOTOR FROM STARTING. ALWAYS USE PROPER LOCKING AND TAGGING PROCEDURES TO PREVENT THE MOTOR FROM STARTING. ALWAYS USE PROPER LOCKING AND TAGGING PROCEDURES TO PREVENT THE MOTOR FROM STARTING.

HIGH VOLTAGE
 T4 → T7 T1 → L1
 T5 → T8 T2 → L2
 T6 → T9 T3 → L3

LOW VOLTAGE
 T1 → T7 L1 T4
 T2 → T8 L2 T5
 T3 → T9 L3 T6

SINGLE VOLTAGE MOTORS
 CONNECT L1-T1, L2-T2, L3-T3

TO REVERSE ROTATION
 INTERCHANGE ANY TWO LINES

CE SA

254706 PLANT M MADE IN U.S.A.
 K927-3-Y-T980-M-100

RELIANCE ELECTRIC E-Z KLEEN PLUS TE IP56

| ID# | P56X4706M | AM | FR | FB56C | TYPE P | PH. 3 |
|-----|-----------|---------|---------|-------|--------|-------|
| HP | RPM | VOLTS | AMPS | HZ | SF | CODE |
| .50 | 1725 | 208-230 | 1.7-1.7 | 60 | 1.15 | J |
| | | 460 | .85 | | | |

TIME RATING CONT INS. CL. F INS. TYPE F+ AMB. 40 NEMA DESIGN 60 HZ NOM EFF 80 QUAR. EFF. POWER FACTOR

200V MIN P56X4706-10SIF

WARNING

RELIANCE ELECTRIC XEX DUTY MASTER

IDENTIFICATION NO. _____ MODEL NO. _____

HP _____ VOLTS _____ HZ _____ PHASE _____

AMPS _____ S.F. _____ AMB. 40°C _____

CONT _____ DUTY _____

POWER FACTOR _____

GUARANTEED EFFICIENCY 87.5 MAX. CORR. KVAR 01.8

OPP. D.E. BEARING 25BC02J30X

1066302

PLANT (G) - UL FILE NO. E34823 MADE IN U.S.A.

DUTY MASTER

IDENTIFICATION NO. _____

HP _____ VOLTS _____ HZ _____ PHASE _____

AMPS _____ S.F. _____ AMB. 40°C _____

CONT _____ DUTY _____

POWER FACTOR _____

GUARANTEED EFFICIENCY 87.5 MAX. CORR. KVAR 01.8

OPP. D.E. BEARING 25BC02J30X

1066302

