

## Waukesha 6 Positive Displacement Pump





Mfg: Waukesha





Model: 6

Stock No: END88305.5

Serial No: 86565 SS

Waukesha 6 Positive Displacement Pump. Model: 6. Flow rate for new pump is 6 gpm with required horsepower and pressure. Discuss with salesperson your process and product to determine if this pump should handle your specific duty. Seal options: field interchangeable single and double "O" ring and mechanical seals. 316 stainless steel product contact surface. (2) 3-1/4 in. rotors. Reliance Electric motor: 1/2 hp, 1725 rpm, 230/460 v, 1.5/.75 a, 60 Hz, 3 phase. Nord motor gear drive: 13.0 ratio, 1.50 max input hp at 1725 rpm. Inlets/outlets: 1-1/2 in. dia. ACME fittings. Overall dimensions: 2 ft. 7 in. L x 10 in. W x 1 ft. H.

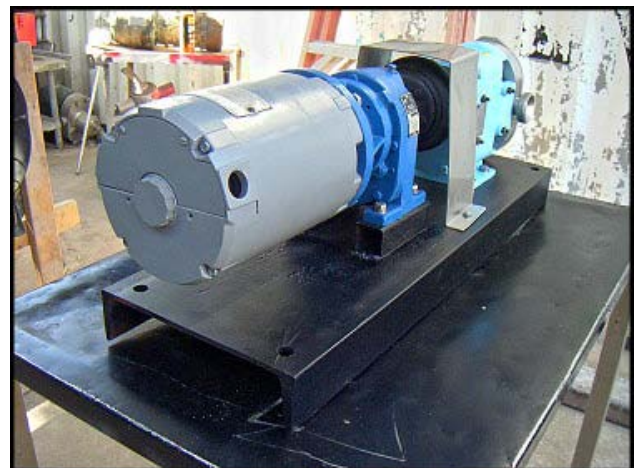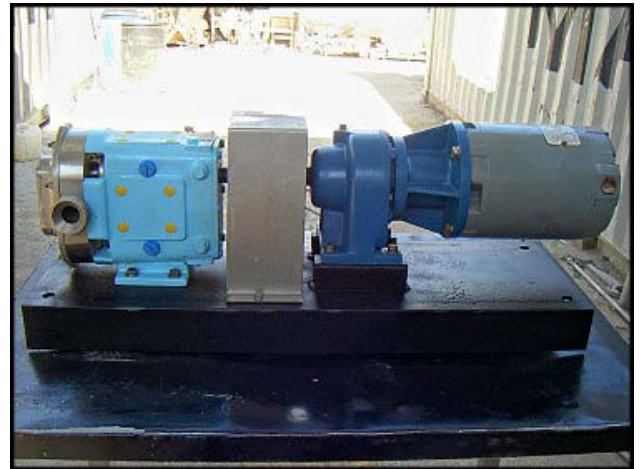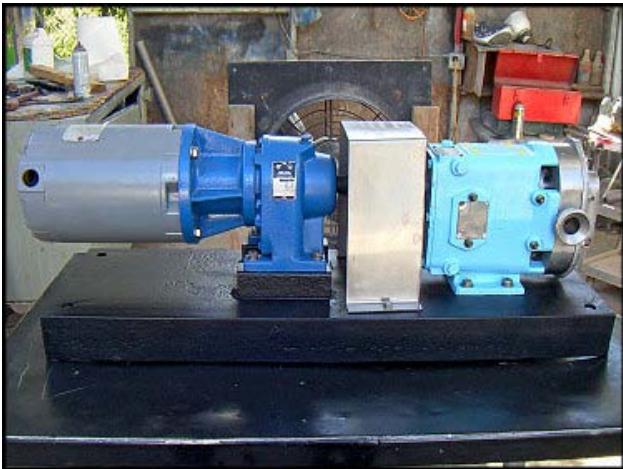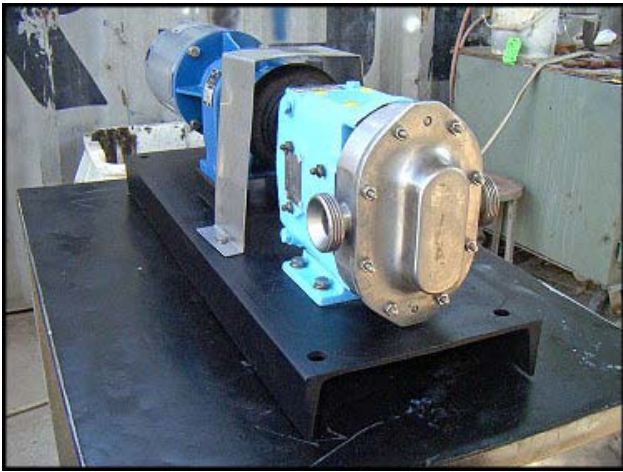

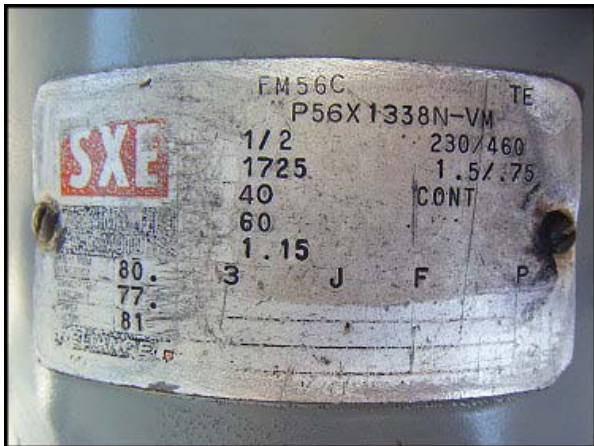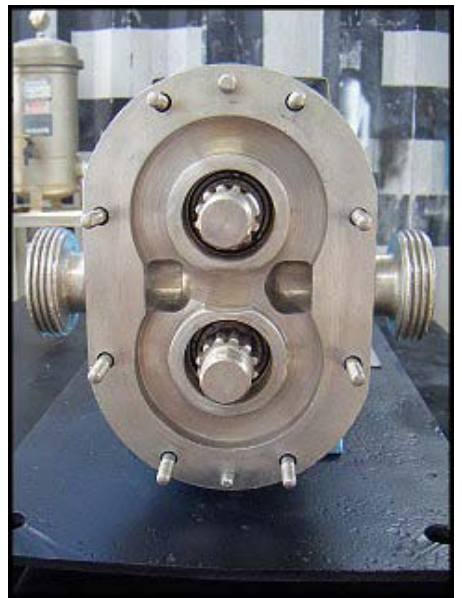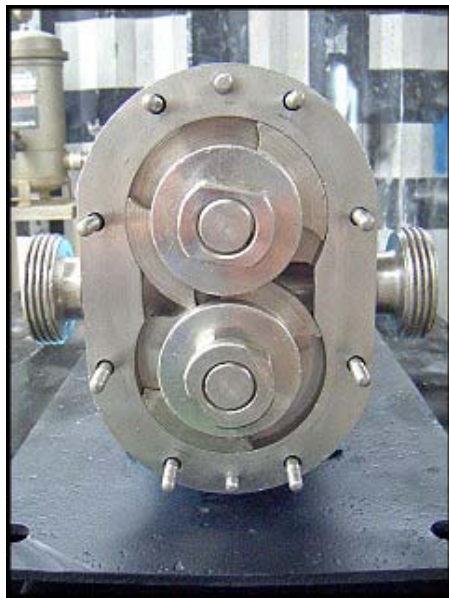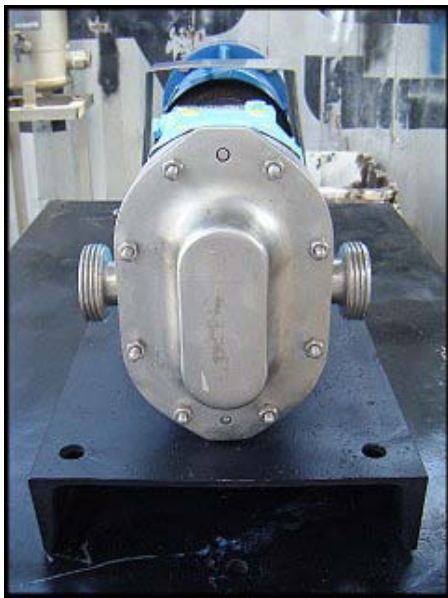

**WAUKESHA**  
 AMCA  
 INTERNATIONAL  
 SERIAL NO. 86565 SS MODEL 6  
 READ AND UNDERSTAND  
 OPERATION AND MAINTENANCE  
 MANUAL BEFORE OPERATION  
 WAUKESHA, WI, U.S.A.

MEMBER OF  
**NORD GEAR CORPORATION**  
 WAUNAKEE, WI. 53597  
 SIZE SK 015 N56  
 SER. NO. 780  
 RATIO 13.0  
 MAX. INPUT 1.50 H.P.  
 AT 1725 RPM

**SXE**  
 FM56C TE  
 P56X1338N-VM  
 1/2 230/460  
 1725 1.5/1.75  
 40 CONT  
 60  
 1.15  
 80. 3 J F P  
 77  
 81