


Capacity / WHP / VHP / NIPR

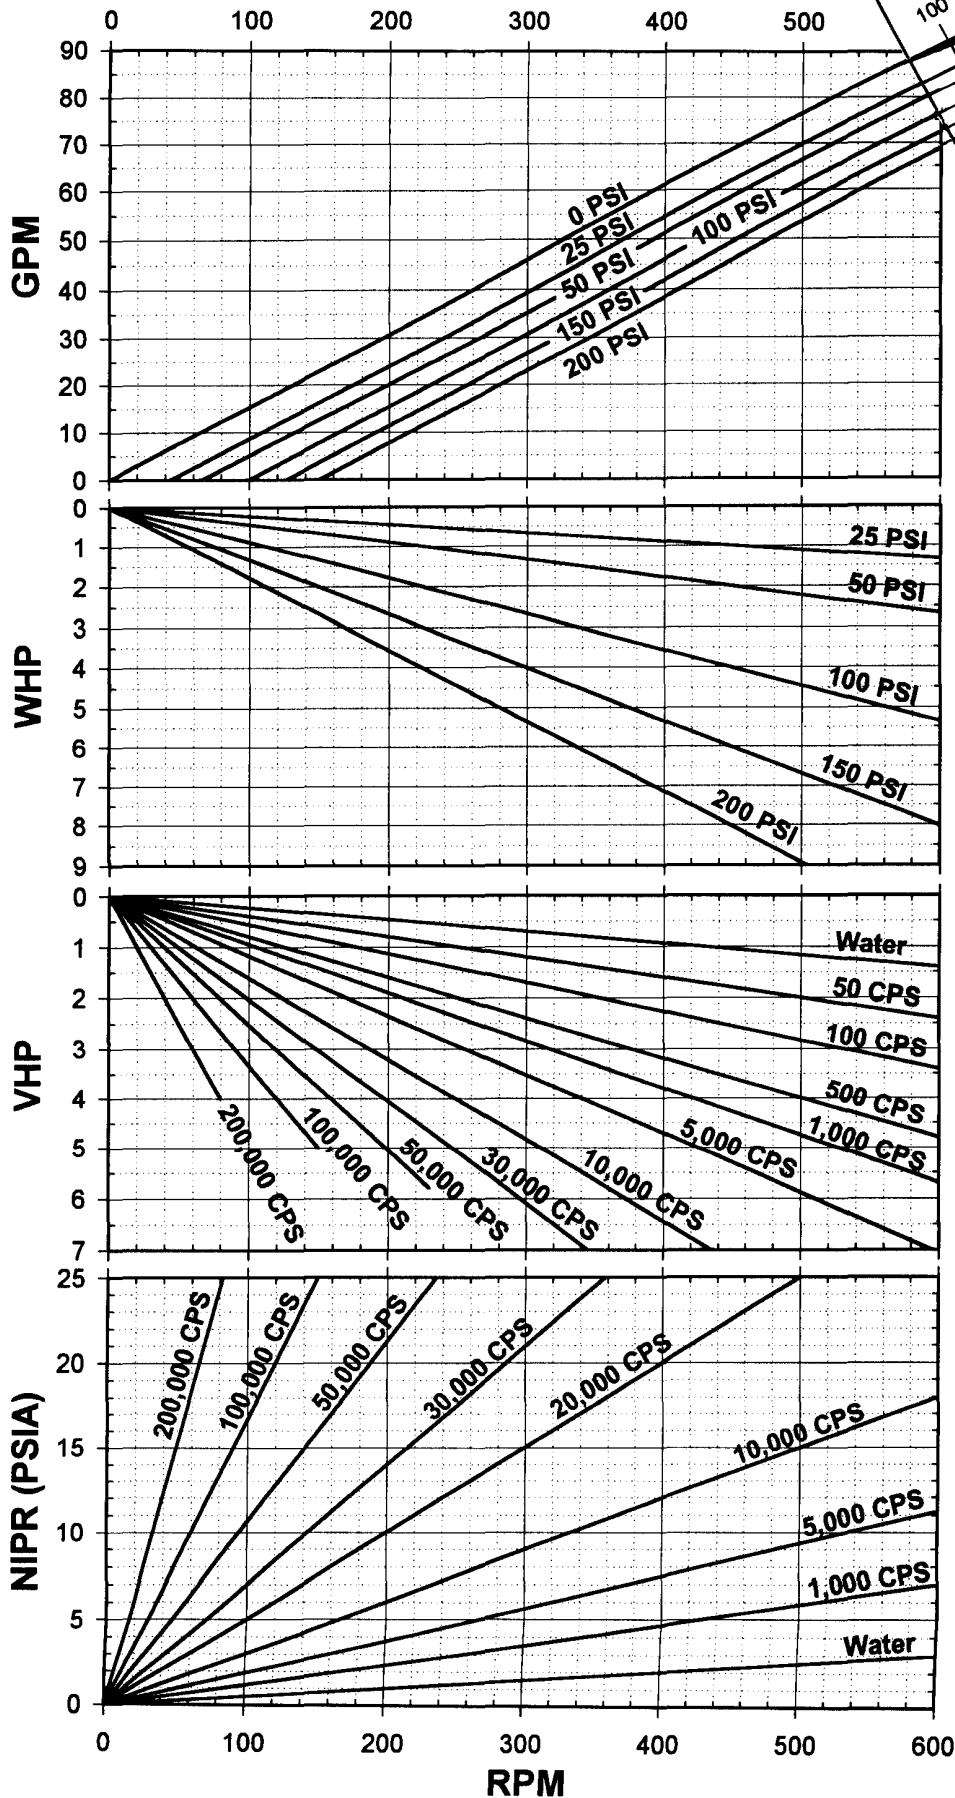

Universal I Sanitary Pumps Model

060

Alloy 88 Rotors
 Standard Clearance
 Standard Port Size = 2.5"
 Displacement =
 0.153 Gal/Rev

BHP = WHP + VHP



**Waukesha
Cherry-Burrell**

611 Sugar Creek Road
 Delavan, WI 53115 USA
 Tel: 1-800-252-5200 or 262-728-1900
 Fax 1-800-252-5012 or 262-728-4904
 E-mail: custserv@gowcb.com
 Web Site: <http://www.gowcb.com>


Effective Date: 2-11-2000
 Specifications subject
 to change without notice

Curve Number
95-07137

Waukesha Cherry-Burrell Products: Universal I Series PD Pumps - Model 060-UI

0-600 RPM speed range. 2½" port size; 3" optional port size; suitable to 200 PSI (13.8 bar) differential pressure. Temperature range -40°F (-40°C) to 300°F (149°C).

NOTE: Contact [Application Engineering](#) for higher pressure or higher temperature applications. For higher pressures, refer to [WCB Universal II Series Pumps](#) and WCB [Pump Notes, PN 12-99](#).

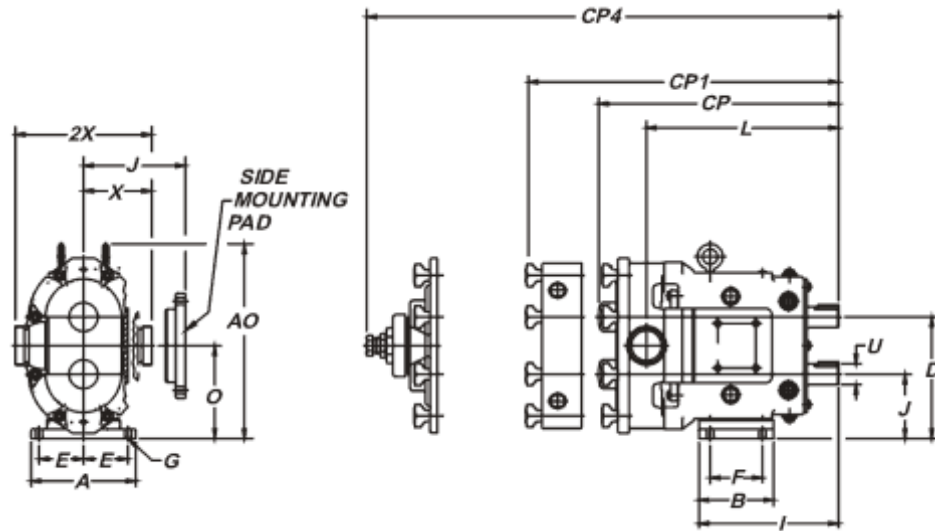

	A	AO	B	CP	CP1	CP4	D	E	F	G	I	J	L	O	U	X	2X
IN	8.25	15.31	5.87	18.91	20.69	22.07	9.56	3.50	4.12	.53	10.99	5.06	15.14	7.31	1.625	5.37	10.75
MM	210	389	149	480	526	561	243	89	105	13	279	129	385	186	41.28	136	273

CP= Standard Cover, CP1= Jacketed Cover, CP4= Manual Vented Cover, Connection sizes for Jacketed Covers are ¾"-14 NPT on Models 006-UI to 030-UI, 1"-11-½ NPT on Models 060-UI and 130-UI.

Dimension 'X' and '2X' apply for Bevel Seat, "S"-Clamp, "Q"-Clamp, 15l and 14l fittings.