


# WATER DEFROST

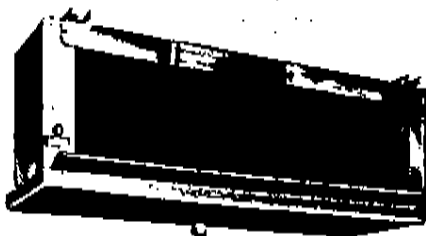

For applications below 32°.

4 aluminum fins/inch, 3/8" copper tubes.  
For R-12, R-22 or R-502, and ammonia  
DX, recirculation or flooded.

For details see Bulletin R-1101.

Model No.	BTU/Hr.		Motor H. P.	Overall Dimensions Approx.			Wt.
	12° T. D.	CFM		L	W	H	
<b>R-12, R-22, R-502—DIRECT EXPANSION</b>							
748LT	9620	1450	1/12	23	34	23	145
948LT	14800	2420	1/4	27 1/2	35 3/4	24 3/4	185
1148LT	19900	3000	(2) 1/12	39 1/2	33 1/2	23 1/4	225
1348LT	30100	4950	(2) 1/4	48 1/2	35 3/4	25	310
1500LT	45400	7450	(3) 1/4	69	35 3/4	25 3/4	460
1700LT	72000	11000	(3) 1/2	75 1/4	37 1/4	34	740
<b>AMMONIA—(a) DIRECT EXPANSION, (b) LIQUID RECIRCULATION</b>							
948XRWA	(a) 14800 (b) 18500	2420	1/4	27 1/2	35 3/4	24 3/4	310
1148XRWA	(a) 19900 (b) 25000	3000	(2) 1/12	39 1/2	33 1/2	23 1/4	430
1348XRWA	(a) 30100 (b) 37700	4950	(2) 1/4	48 1/2	35 3/4	25	585
1500XRWA	(a) 45400 (b) 56800	7450	(3) 1/4	69	35 3/4	25 3/4	865
1700XRWA	(a) 72000 (b) 90000	11000	(3) 1/2	75 1/4	37 1/4	34	1410
2100XRWA	(a) 120000 (b) 150000	18300	(5) 1/2	123 1/2	36 1/2	33 3/4	2350
<b>AMMONIA—FLOODED</b>							
2708FWA	30600	5060	(2) 1/4	55	34 1/2	27	635
2900FWA	46100	7600	(3) 1/4	77 1/2	35 3/4	27 1/4	930
3100FWA	77000	12700	(3) 1/2	77 1/2	36 3/4	40	1430

**RECOLD CORPORATION — 7250 East Slauson**